

Features

- Ideal for testing active and passive speakers
- Sine signal with 1 watt output power @ 8 Ω, min. impedance 4 Ω
- Line out for testing active speakers or amplifiers etc.
- Sweepable frequency 20 Hz to 20 kHz
- Max. output level at XLR socket 2 V
- Power supply via 9 V battery
- XLR output switchable for line or speaker level
- Speakon output for passive speaker test
- Dimensions: 110 × 72 × 40 mm

Operating

If you want to test a passive speaker, connect it to the XLR ⑤ or Speakon output ⑥. When using the XLR output, the [Output] button ② must be pressed in order to output an unbalanced signal with speaker level on pin 1 & 2 of the XLR jack.

If you want to test an active speaker, amplifier or similar, connect it to the XLR output. The [Output] button must not be pressed then, so the XLR jack outputs a balanced line level signal.

Switch on the device with the [Power] button ① and turn the [Volume] knob ③ until you hear a clear tone. The [Volume] knob controls both the XLR and Speakon output. To test the individual speakers in a multi-way system, you can set the [Frequency] knob ④ to an appropriate frequency. After finishing testing, switch off the device with the [Power] button.

Pin assignment XLR jack:

• [Output] switch pressed:

PIN 1 = signal (-)

PIN 2 = signal (+)



PIN 3 = not connected

• [Output] switch not pressed:

PIN 1 = ground

PIN 2 = signal (+)

PIN 3 = signal (-)

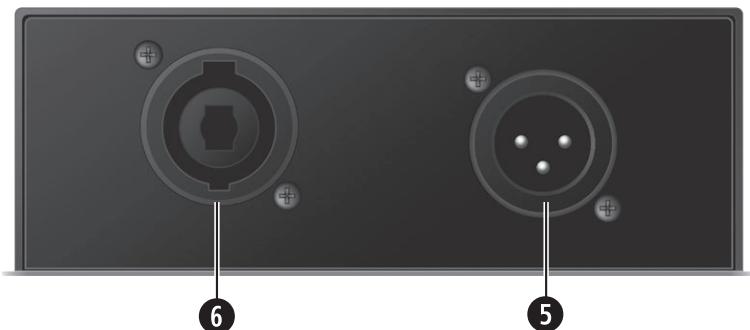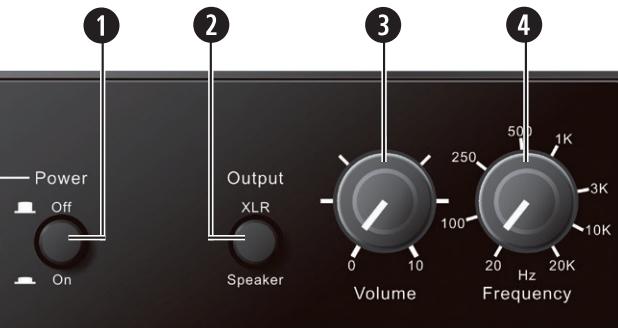

Pin assignment Speakon socket:

The signal is output to all 4 poles of the socket

PIN 1+ and 2+ = signal (+)

PIN 1- and 2- = signal (-)



This device is intended to be used for function tests of loudspeakers. Any other use or use under other operating conditions is considered to be improper and may result in personal injury or property damage. No liability will be assumed for damages resulting from improper use.



Ensure that plastic bags, packaging, etc. are properly disposed of and are not in the reach of babies and young children. Choking hazard! Ensure that children do not detach any small parts (e.g. knobs or the like) from the product. They could swallow the pieces and choke! Never let children use electrical devices unattended.

For the transport and protective packaging, environmentally friendly materials have been chosen that can be supplied to normal recycling.

Ensure that plastic bags, packaging, etc. are properly disposed of. Do not just dispose of these materials with your normal household waste, but make sure that they are collected for recycling. Please follow the notes and markings on the packaging.

This product is subject to the European Waste Electrical and Electronic Equipment Directive (WEEE) in its currently valid version. Do not dispose of your old device with your normal household waste. Dispose of

this product through an approved waste disposal firm or through your local waste facility. Comply with the rules and regulations that apply in your country. If in doubt, consult your local waste disposal facility.

Batteries must not be disposed of as domestic waste or thrown into fire. Dispose of batteries according to national or local regulations regarding hazardous waste. To protect the environment, dispose of empty batteries at your retail store or at appropriate collection sites.